

LINERGY BS 4P MULTISTAGE BB 250A 52HOLES

LVS04053

Range	Linergy
Range of product	Linergy
Product or component type	Multi-stage distribution block
Product name	Linergy BS
Range compatibility	PrismaSeT G enclosure PrismaSeT P enclosure
Product compatibility	Spacial enclosures
IP degree of protection	IPxx B

Complementary	
Mounting support	Plain backplate Prisma upright
Mounting mode	Horizontal Vertical
Poles description	4P
[Ue] rated operational voltage	440 V AC
[Ui] rated insulation voltage	750 V AC
[Uimp] rated impulse withstand voltage	8 kV
[le] rated operational current	250 A
[In] rated current	250 A at 40 °C
[Icw] rated short-time withstand current	13 kA for 1 s
[lpk] rated peak withstand current	30 kA
I ² t on activation	169000000 A².s
Busbar cross section	20 x 5 mm
Connections - terminals	Supply: crimped lug50 mm² Supply: flexible bars, 20 x 3 mm Distribution: M6 holes (phase) , 13 x 150 mm²
Height	235 mm
Width	470 mm
Depth	115 mm

Net weight	3.2 kg
Environment	
Environment	
Standards	IEC 61439-1, inside enclosure IEC 61439-2, inside enclosure
Product certifications	ASTA
Packing Units	
Unit Type of Package 1	PCE
Package 1 Length	55.0 cm
Number of Units in Package 1	1
Package 2 Width	80.0 cm
Package 2 Height	92.0 cm
Package 2 Weight	102.0 kg
Package 1 Width	26.0 cm
Package 1 Height	16.0 cm
Package 1 Weight	3.04 kg
Number of Units in Package 2	30
Unit Type of Package 2	P12
Package 2 Length	120.0 cm
Offer Sustainability	
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes

Pro-active China RoHS declaration (out of China RoHS legal scope)

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

China RoHS declaration

Yes


China RoHS Regulation

WEEE

PVC free

Technical Illustration

Dimensions

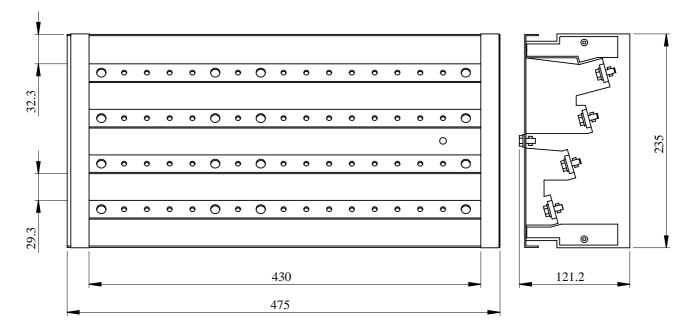

- All dimensions are approximate and are in mm.Also see technical documentation.